


FAST DONNING SAFETY BUCKLE

Complex Buckles | 316 Stainless Steel

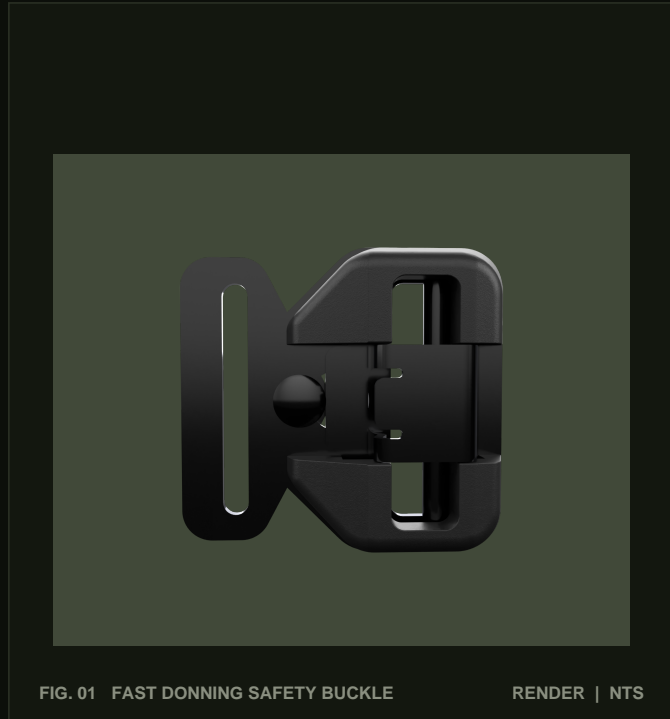

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0530	40mm	6	44	24	60	66	630	135
0532	50mm	6	54	24	70	75	500	154
0534	50mm (15kN)	6	52	27	73.5	83	1500	210

A = Internal Width · B = Internal Height · C = Thickness
 D = External Height · E = External Width

02 OVERVIEW

Makefast Fast Donning Safety Buckle — part of the Complex Buckles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 3 webbing variants: 0530 (40mm), 0532 (50mm), 0534 (50mm (15kN)).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.