


HIGH STRENGTH PLASTIC BUCKLE

Complex Buckles | 316 Stainless Steel

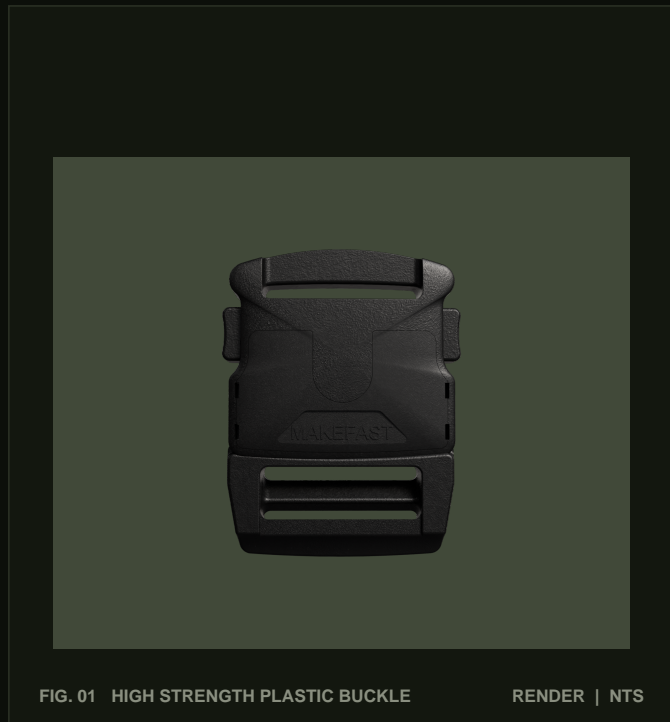

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0650	40mm	54	41	14	63	80	200	55

A = Internal Width · B = Internal Height · C = Thickness
D = External Height · E = External Width

02 OVERVIEW

Makefast High Strength Plastic Buckle — part of the Complex Buckles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 1 webbing variant: 0650 (40mm).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.