

# SLIMCLICK BUCKLE

Complex Buckles | 316 Stainless Steel

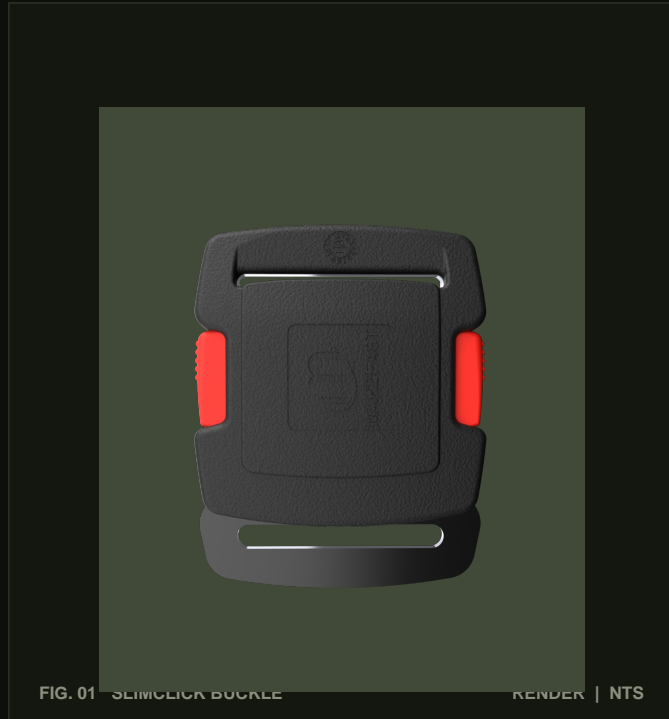


FIG. 01 – SLIMCLICK BUCKLE RENDER | NTS

## 01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0427	45mm	5	45	17	70	105	800	148
0428	50mm	5	50	17	70	105	800	148

A = Internal Width · B = Internal Height · C = Thickness  
 D = External Height · E = External Width

## 02 OVERVIEW

Makefast Slimclick Buckle — part of the Complex Buckles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 2 webbing variants: 0427 (45mm), 0428 (50mm).

## 03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

## 04 COMPLIANCE & STANDARDS

<b>ISO 9001:2015</b>	<b>NCAGE</b>	<b>JOSCAR</b>	<b>MIL-A-8625</b>
CERT. <b>FM60306</b>	NATO CODE <b>U2DU3</b>	STATUS <b>Registered</b>	FINISH <b>Available</b>

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.