


OVERCENTRE LATCH

Interlocking Buckles | 316 Stainless Steel

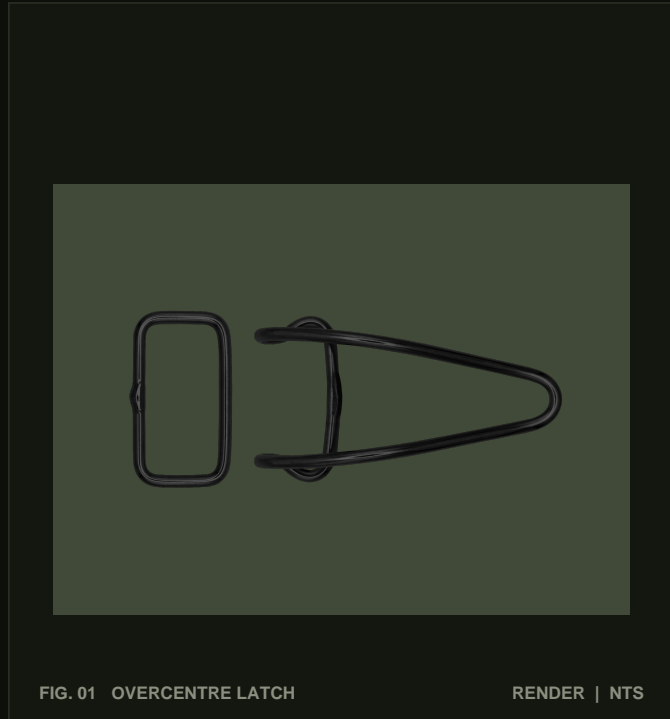

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0315	40mm	25	16	5	105	47	1750	46
0378	40mm	45	20	5	30	55	1750	20
0381	50mm	35	16	5	105	57	1750	48
0312	50mm	54	25	5	35.4	63.4	1750	24

A = Internal Width · B = Internal Height · C = Thickness
D = External Height · E = External Width

02 OVERVIEW

Makefast Overcentre Latch — part of the Interlocking Buckles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 4 webbing variants: 0315 (40mm), 0378 (40mm), 0381 (50mm), 0312 (50mm).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.