


# SLIDE

Interlocking Buckles | 316 Stainless Steel

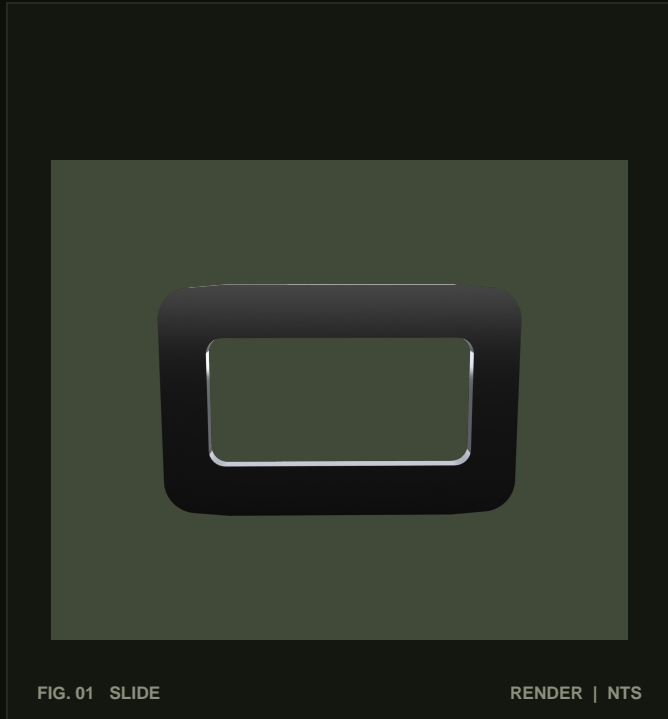

## 01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0521	25mm	29	22	2	36	42	375	10
0541	40mm	40.8	20	3	36	55	950	25
0543	45mm	45.8	20	3	36	60	950	29
0308	50mm	50.9	22.4	3	41.7	65.2	1000	34

A = Internal Width · B = Internal Height · C = Thickness  
 D = External Height · E = External Width

## 02 OVERVIEW

Makefast Slide — part of the Interlocking Buckles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 4 webbing variants: 0521 (25mm), 0541 (40mm), 0543 (45mm), 0308 (50mm).

## 03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

## 04 COMPLIANCE & STANDARDS

<b>ISO 9001:2015</b>	<b>NCAGE</b>	<b>JOSCAR</b>	<b>MIL-A-8625</b>
CERT. <b>FM60306</b>	NATO CODE <b>U2DU3</b>	STATUS <b>Registered</b>	FINISH <b>Available</b>

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.