


PRECISION ADJUSTER

Precision Adjusters & Ladderlock | 316 Stainless Steel

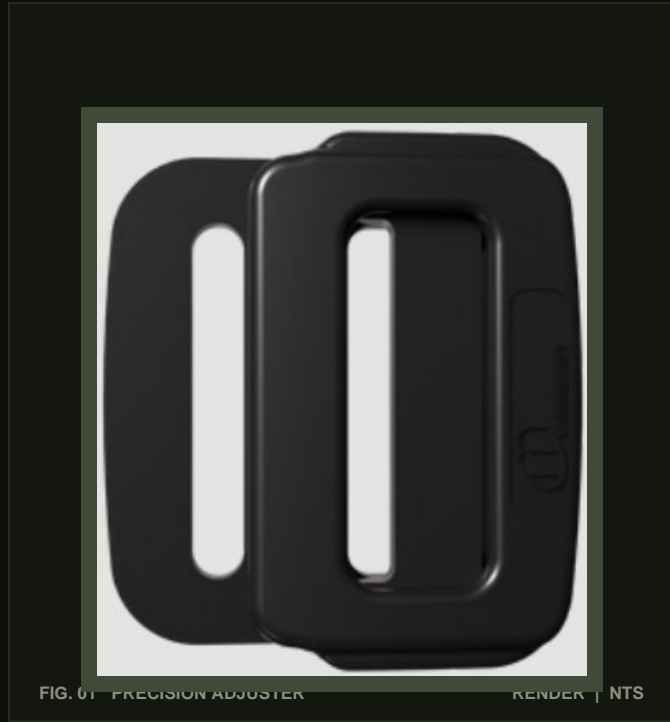

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
3530	25mm	—	—	—	—	—	—	—
3520	40mm	41	6	10.2	55	62	750	78
3510	45mm	46	6	10.2	55	67	750	83
3500	50mm	51	6	10.2	55	72	750	89

A = Internal Width · B = Internal Height · C = Thickness
 D = External Height · E = External Width

02 OVERVIEW

Makefast Precision Adjuster — part of the Precision Adjusters & Ladderlock range. Engineered for milspec defence programmes with verified mechanical performance. Available in 4 webbing variants: 3530 (25mm), 3520 (40mm), 3510 (45mm), 3500 (50mm).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.