

LONG D RING

Rings, Dees & Triangles | 316 Stainless Steel

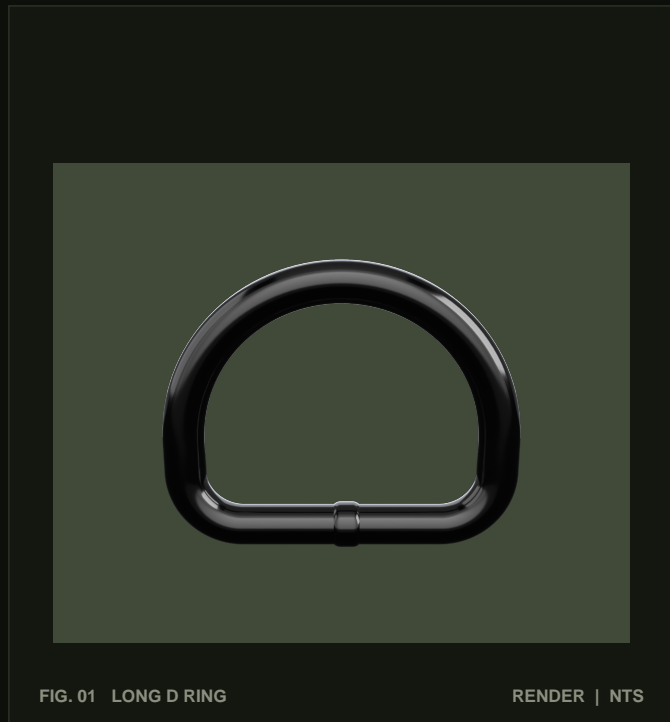


FIG. 01 LONG D RING

RENDER | NTS

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0128B	50mm	53	40	8	56	75	4750	83
6127B	50mm	51	37	7	51	65	3750	54

A = Internal Width · B = Internal Height · C = Thickness
 D = External Height · E = External Width

02 OVERVIEW

Makefast Long D Ring — part of the Rings, Dees & Triangles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 2 webbing variants: 0128B (50mm), 6127B (50mm).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.