

TRIANGLE

Rings, Dees & Triangles | 316 Stainless Steel

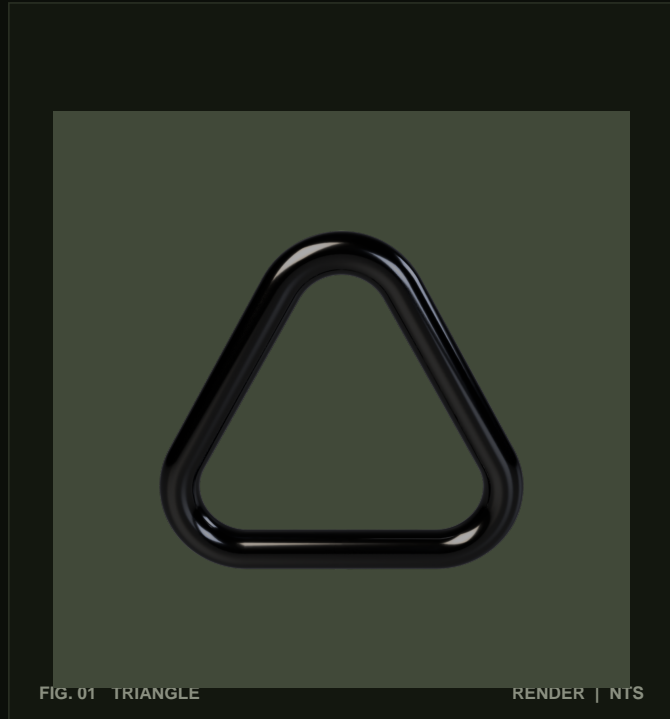


FIG. 01 TRIANGLE

RENDER | NTS

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	BL kg	WT g
0245	25mm	27	24.7	5	34.7	37	1750	19
0247	40mm	42	37.7	5	47.7	52	1750	27
0222	45mm	47	30	6	42	59	2750	36
0141	50mm	50	44.5	6	57.1	62.6	2750	43

A = Internal Width · B = Internal Height · C = Thickness
 D = External Height · E = External Width

02 OVERVIEW

Makefast Triangle — part of the Rings, Dees & Triangles range. Engineered for defence and tactical programmes with verified mechanical performance. Available in 4 webbing variants: 0245 (25mm), 0247 (40mm), 0222 (45mm), 0141 (50mm).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.