


STERNUM BUCKLE

Sternum Buckles & Triglides | 316 Stainless Steel

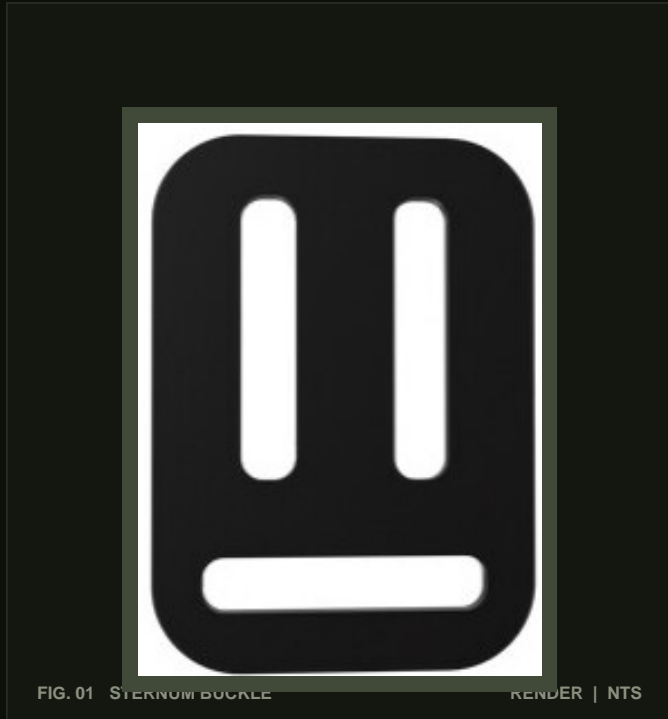

01 TECHNICAL SPECIFICATIONS

PART NO.	WEBBING	A mm	B mm	C mm	D mm	E mm	F mm	BL kg	WT g
0852	25mm	—	—	—	—	—	—	—	—
0847	25/40mm	—	—	—	—	—	—	—	—
0840	25mm	—	—	—	—	—	—	—	—
0848	25/40mm	37	84	8	100	21	17.5	3300	108

A = Internal Width · B = Internal Height · C = Thickness
 D = External Height · E = External Width · F = Length

02 OVERVIEW

Makefast Sternum Buckle — part of the Sternum Buckles & Triglides range. Engineered for milspec defence programmes with verified mechanical performance. Available in 4 webbing variants: 0852 (25mm), 0847 (25/40mm), 0840 (25mm), 0848 (25/40mm).

03 CUSTOMISATION

■ CUSTOM DIMENSIONS & TOLERANCES	■ 316 STAINLESS STEEL FINISH	■ POWDER COAT OR ANODISED OPTIONS
■ RAL COLOUR MATCHING	■ OEM VOLUME B2B SUPPLY	■ UK MANUFACTURED & CERTIFIED

04 COMPLIANCE & STANDARDS

ISO 9001:2015	NCAGE	JOSCAR	MIL-A-8625
CERT. FM60306	NATO CODE U2DU3	STATUS Registered	FINISH Available

Breaking loads apply to 316 Stainless Steel variants only. Values are guidance for straight-pull testing and do not form part of any warranty. SWL recommended at 1/5 of BL. All dimensions are nominal.